

LONGITUDINAL WAVES IN CHANNELS AND THEIR ACTION ON BANK SLOPES

SH. GAGOSHIDZE, M.LORDKIPANIDZE

This paper was prepared within the framework of the “Integrated Coastal Monitoring of Environmental Problems in Sea Region and the Ways of their Solution” -- ICME Project

Be received 12.10. 2015

Alongshore waves are dominant in open river and maritime canals. For water area, from one side limited by arbitrarily sloped shore endlessly running deep into the sea, they were studied by Stocks, but due to significant mathematic difficulties for total depth canals the amount of accurate solutions is limited by just some private cases which are hardly applicable in practical use.

Some results of approximate solution of the problem about propagation of alongshore waves laying over the stationary flow in trapezoid canal are presented. The solution is based on the application of direct Galerkin-Kantorovich method in three-dimension linear equations for wave hydromechanics written in cylindrical coordinate system. The obtained solutions maintain the three-dimension structure of the waves over the shore slope and lead to the results easily applied in the design

Key words: *longitudinal waves, flow, canal depth, slope wetting heigh, coastal slopedeformation*

Longitudinal waves are the dominating ones in open maritime and navigation river channels. For a area having only one side bounded by an arbitrarily sloping wall, these waves were studied by Stokes [1], but because of great mathematical difficulties for channels of finite depth the quantity of exact solutions is limited only to a few particular cases [1] - [4] which are difficult for practical use.

Below we present some of our results of approximate solution of the problem on propagation of longitudinal waves imposed on a stationary flow in a trapezoidal channel. The solution is based on the application of the Galerkin-Kantorovich direct method [5] to three-dimensional linear equations of wave hydromechanics written in a cylindrical system of coordinates x, r, α , (see Fig. 1)

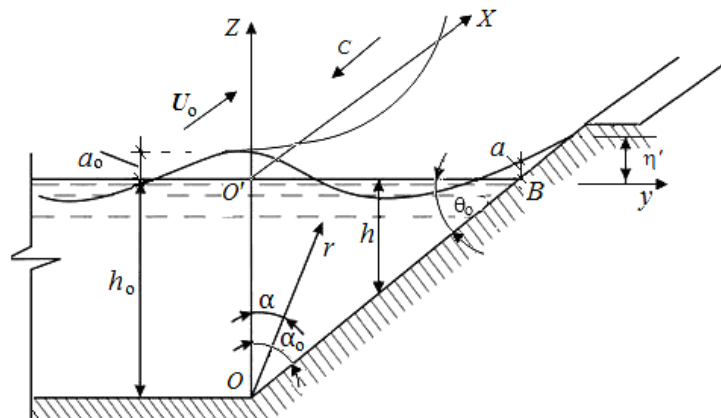


Fig. 1. Design diagram of alongshore waves in trapezoidal channel

where x is a longitudinal coordinate; r is the radius vector taking its origin on the line of intersection of the bank slope with the channel bottom and acting in the sector bounded by the vertical z -axis and the bank slope θ_0 towards the horizon; α is a polar angle that varies from $\alpha=0$ on the z -axis to $\alpha = \alpha_0$ on the bank slope plane. The following expressions were obtained for the velocity potential (φ) and vertical deviations of the free surface (η) of longitudinal waves:

$$\varphi = U_0 x \pm a_0 \frac{g}{\sigma - kU_0} \frac{\cosh(kr)}{\cosh(kh_0)} \frac{\cos m(\alpha - \alpha_0)}{\cos(m\alpha_0)} \cos(\sigma t \pm kx) ; \quad (1)$$

$$\eta = a_0 \frac{\cosh(kh_0 / \cos \alpha)}{\cosh(kh_0)} \frac{\cos m(\alpha - \alpha_0)}{\cos(m\alpha_0)} \sin(\sigma t \pm kx), \quad (2)$$

where U_0 is the stationary flow velocity; h_0 and a_0 are respectively the flow depth and the wave amplitude given in the rectangular part of the channel; $\sigma = 2\pi/\tau$ is the wave disturbance frequency; τ is the period of time; $k = 2\pi/\lambda$ is the wave number; λ is the length of a longitudinal wave; the signs " \pm " correspond to the propagation of counter-flow waves and waves whose direction coincides with that of a flow; m is the so-called transverse wave number on which depends the wave surface configuration crosswise the channel. In particular, if in a channel there propagate relatively short waves for which the number m is defined by the asymptotic relation

$$m = \left(\frac{kh_0}{\cos \alpha_0} - \frac{1}{2} \right)^{1/2}, \quad (3)$$

then the free water surface acquires the mode of standing wave oscillations. These oscillations have longitudinal stationary nodal lines, the number of which over the bank slope is calculated by the integer part of the number n defined by the equality

$$n = \frac{m\alpha_0}{\pi} + \frac{1}{2}. \quad (4)$$

For all values of n we use the limit dispersion relation

$$(\sigma - kU_0)^2 = gk \cos \alpha_0 \cdot \tanh(kh_0 / \cos \alpha_0), \quad (5)$$

Whereas the connection between the wave amplitudes on the bank line a and above the bank slope base a_0 is expressed by the relation

$$\frac{a}{a_0} = \left| \frac{\cosh(kh_0 / \cos \alpha_0)}{\cosh kh_0 \cdot \cos m\alpha_0} \right|, \quad (6)$$

according to which a is always larger than a_0 and much exceeds a_0 in the presence of short waves, i.e. for large kh_0 . In that case, the equation of free surface near the bank asymptotically leads to the results calculated by the Stokes relation. Also, if the wave steepness on the shore line is

$$\frac{a}{\lambda} \geq \frac{\tan \theta_0}{2\pi e \cos \theta_0}, \quad (7)$$

where $e = 2.718$ is the Neper number, then above the shoreline waves will wet the bank slope only with destroyed crests. Graphic picture (7) is provided in Fig. 2.

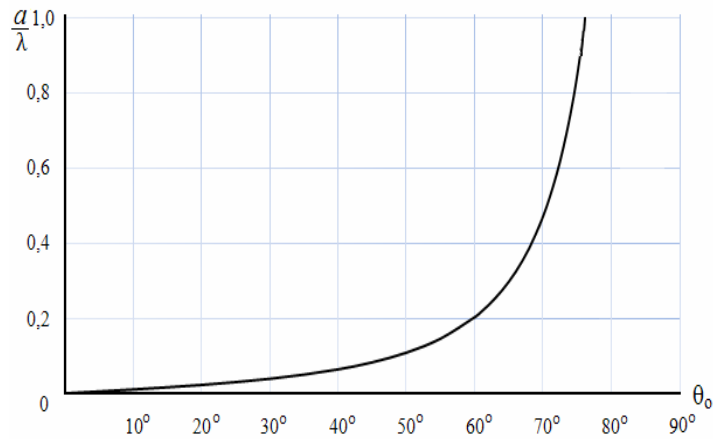


Fig. 2. Limit steepness of the wave crest above the shoreline of trapezoidal channel

According to Fig.1. Even for very steep coast slope, in particular, for the slope with an angle dipping to the horizon $\theta_0 = 60^\circ$, the maximum steepness of the alongshore waves at the shoreline does not exceed $\frac{a}{\lambda} = 0.2$. In larger alongshore wave steepness, above the shoreline, will wet the slope of the slope at 60° only with broken ridges.

Using these relations and estimating the static stability of the bank slope of a trapezoidal channel built of loose soil, we can come to a conclusion that by washing-out the bank slope of the channel long waves give a concave shape (Fig. 3), whereas relatively short longitudinal waves give it a convex shape (see Fig.4).

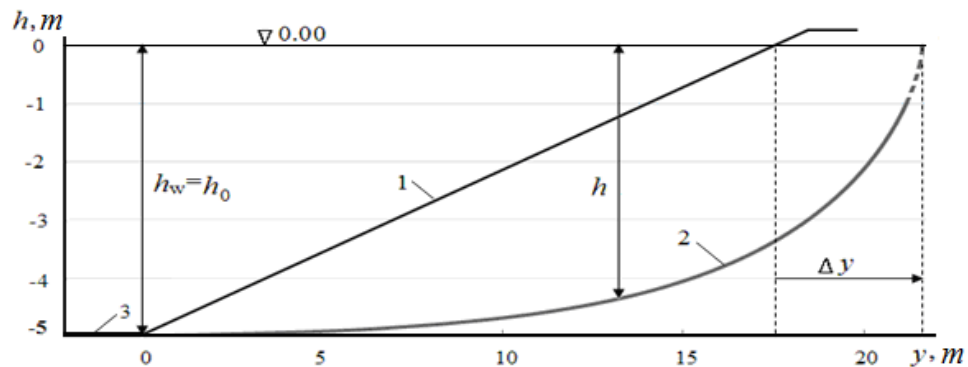


Fig. 3. A typical outline of the washed-out coastal slope by the long alongshore waves
 1- initial (designed) contour of the coastal slope; 2- contour of the washed-out slope;
 3- channel invert

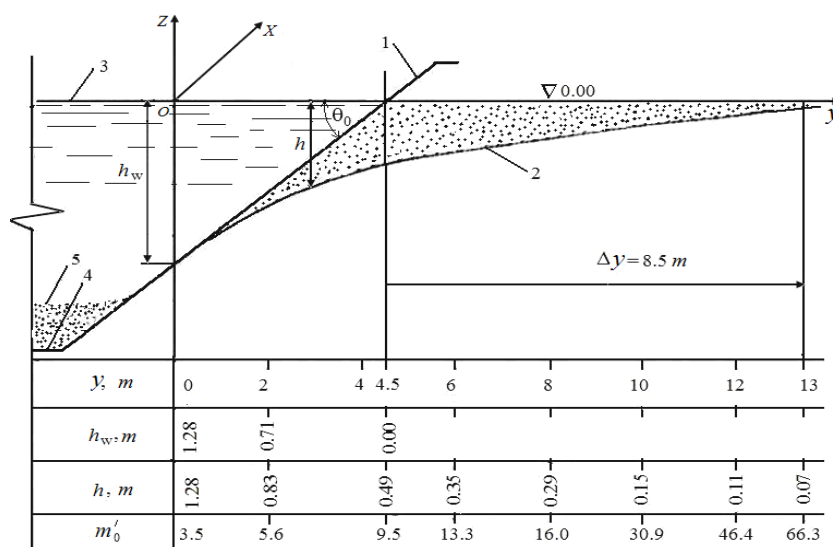


Fig. 4. Deformation contour of a coastal slope of one of the sea channel

1 – Design contour of the coastal slope; 2 – washed-out coastal slope; 3 – surface of the water in the channel; 4 – designed channel invert; 5 – deposited soil; h_w - designed water depth; h - water depth after wash-out of the slope; y – transverse coordinates, counted from a vertical where there is no wash-out of the coastal slope ($h_w=1,3$ m); m'_0 - laying of a slope of washed-out coast.

Calculation is conducted by the following initial data: an initial depth of a channel $h_0=5$ m; designed sense of ratio of inclination $m_0=\cot\theta_0=3.5$; average particle size of channel soil

$d = 0.5 \cdot 10^{-4}$ m; relative density of water and soil particles in suspension state $\gamma=1$ ton/m³ и $\gamma'=1.6$ ton/m³; length and amplitude of an alongshore wave $\lambda=4.0$ m и $a=0.35$ m. The results of the calculation are in accordance with data of full-scale monitoring of wash-out of the coasts of seaport channel.

REFERENCES

1. Lamb G. Hydrodynamics. M:Gostekhizdat. 1947.
2. Constantin A. Edge waves along a sloping beach // J. Phys. A: Math. Gen. 34. 2001.
3. Johnson R.S. Some contributions to the theory of edge waves // J. Fluid Mech. Vol 524. 2005.
4. Practical manual in ocean dynamics. Edited by A.V. Nekrasov and E.N.Pelinovski. Sankt-Petersburg:Gidromteoizdat. 1992.
5. Kantorovich L.V., Krilov V.N. Approximate methods of higher analysis/ M.:Fizmatgiz. 1962.